

SR2 High Security Fencing


358 Rigid mesh security fencing system to LPS 1175 SR2 Issue 7
Approved for Government use – contact CPNI for more info



Scan for more info

The SR2-358 Prison mesh is one of the ultimate demonstrations of security, and it doesn't have to compromise on aesthetics. Approved for government use, the SR2-358 is the second solution in a formidable array of defences; suitable also for stadiums, business premises, utility suppliers, high-security aviation and transportation units, as well as the likes of schools and retail units.

The SR2 system has been certified by the Loss Prevention Certification Board to provide a minimum of 3 minutes delay against attack. You can also add additional security features, and accompany this system with automated gates for increased access control.

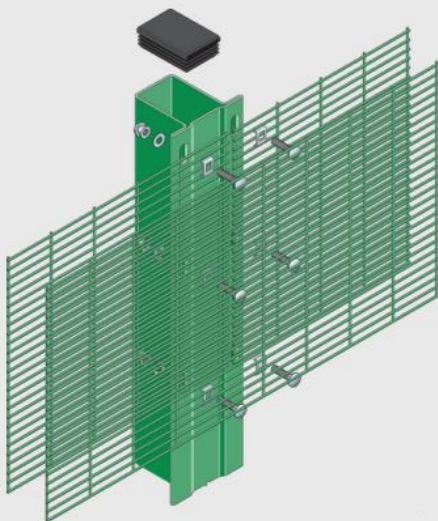

Features

Double layer mesh system

Excellent visibility for CCTV systems

Base LPS 1175 SR2 Issue 7 and Secured by Design accredited

Ideal for Data centres, MoD, Government sites, Ports, Airports, Utilities



National Protective Security Authority

SR2 High Security Fencing

358 Rigid mesh security fencing system to LPS 1175 SR2 Issue 7
Approved for Government use – contact CPNI for more info



Technical product information

Standard	LPS 1175 SR2 Issue 7 BS1722-14: 2017 BS EN ISO 1461:2009 BS EN 13438:2013 Approved for Government Use. Contact CPNI for more info. Secured By Design – Police Preferred Specification.
Panel type	Mesh and wire. Double layered mesh system. High aluminium content and powder coated to min 80 microns dft.
Panel width	2518mm
Wire diameter	4mm
Mesh size	76.2 x 12.5mm
Available heights	2440mm to 5000mm
Finish	Polyester powder-coated to min. 60 microns. Any RAL colour including metallics available.
Top Edge Projection	Nil
Panel installation	Bottom of panel minimum 300mm below ground, must be assembled on site.
Security topping options	Barbed and razor wire, cranked and straight
Post dimensions	80mm x 60mm
Post centres	2528mm +/- 9mm
Posts	Special flanged post, galvanised after manufacture and polyester powder-coated to match fencing.
Fixings	120mm x 6mm full length clamp bar. M8 Stainless steel cup square bolt (min 30mm) and clips on main posts
Foundations	Set posts in holes minimum 450mm square x 950mm deep.
Warranty	Min. 15 years against manufacturing defects.

Disclaimer:

Every care has been taken to ensure that all information provided on this data sheet is accurate. New Forest Fencing Ltd reserves the right to change the product specification at any time. Please ensure that you have the latest information which can be found on our website or by contacting our team.